

Spicer® Single Reduction Single Axles



SPICER®

Drivetrain Products

17060

21060

19060

22060


17,000 lbs. [7,711 kg] – 22,000 lbs. [9,979 kg]

Single Reduction Axles Tough Enough for any Medium-Duty Application

Maximum performance and durability for city delivery, beverage hauling, rental fleet, utility truck, school bus, motorhome, or any medium-duty application.

Advanced designs and the latest manufacturing technology mean lower life cycle cost.

- Broad range of gear ratios allow for optimum powertrain specification.
- Viton™ oil seals keep lube in, dirt and road grime out.
- Involute splines on drive pinion and axle shafts for greater torque capacity.
- Precision Flow forged differential gears for greater strength and impact resistance.
- 060 Series models feature:
 - Reduced assembly weight for increased performance and productivity.
 - Optional driveline mounted parking brake.
 - Stronger wheel differential assembly to resist damaging shock loads.
 - Optional driver-controlled wheel differential lock for maximum traction over slippery or uneven surfaces.
- Optional limited slip differential for enhanced traction automatically.
- Optional GenTech™ gearing reduces noise level for vehicle occupants in coach and bus applications.
- Backed by comprehensive Dana® service support.

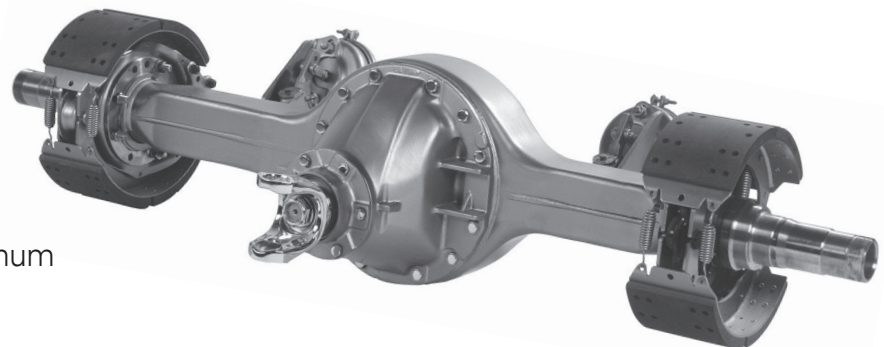

Spicer® 21060 Single Reduction Single Axle

Spicer® Medium-Duty Single Drive Axle

GAW Ratings*:

MODELS	
17060S, 17060D, 17060L	17,000 lbs.
19060S, 19060D, 19060L	19,000 lbs.
21060S, 21060D, 21060L	21,000 lbs.
22060S, 22060D, 22060L	22,000 lbs.
22060SH	22,000 lbs.

GCW Ratings*:


MODELS	HIGHWAY	ON-OFF HWY	OFF HWY
17060S/D/L	60,000 lbs.	40,000 lbs.	45,000 lbs.
19060S/D/L	60,000 lbs.	50,000 lbs.	45,000 lbs.
21060S/D/L	60,000 lbs.	50,000 lbs.	45,000 lbs.
22060S/D/L	60,000 lbs.	50,000 lbs.	45,000 lbs.
22060SH	60,000 lbs.	50,000 lbs.	45,000 lbs.

*Note: These are nominal ratings. Actual load rating varies with application duty cycle. Applications require Dana CVS Application Engineering approval.

Available Ratios:

MODELS	RATIOS
17060S/D/L	3.08, 3.25, 3.36, 3.55, 3.70, 3.90, 4.11, 4.30, 4.33, 4.63, 4.78,
19060S/D/L	4.88, 5.29, 5.38, 5.57, 6.17, 6.50, 7.17
21060S/D/L	
22060S/D/L	
22060SH	4.30, 4.78

Model Nomenclature:

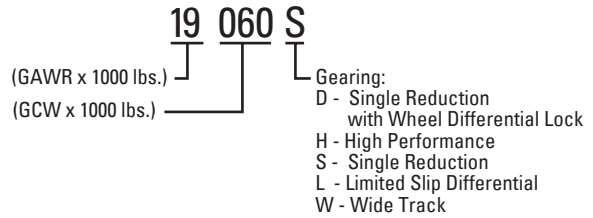

For spec'ing or service assistance, call 1-877-777-5360 or visit our website at www.dana.com

Dana Commercial Vehicle Products Group

3939 Technology Drive
 Maumee, Ohio, USA 43537

www.dana.com



SPICER®

Drivetrain Products